


ALTERNATE TOP CONSTRUCTION

N.T.S.

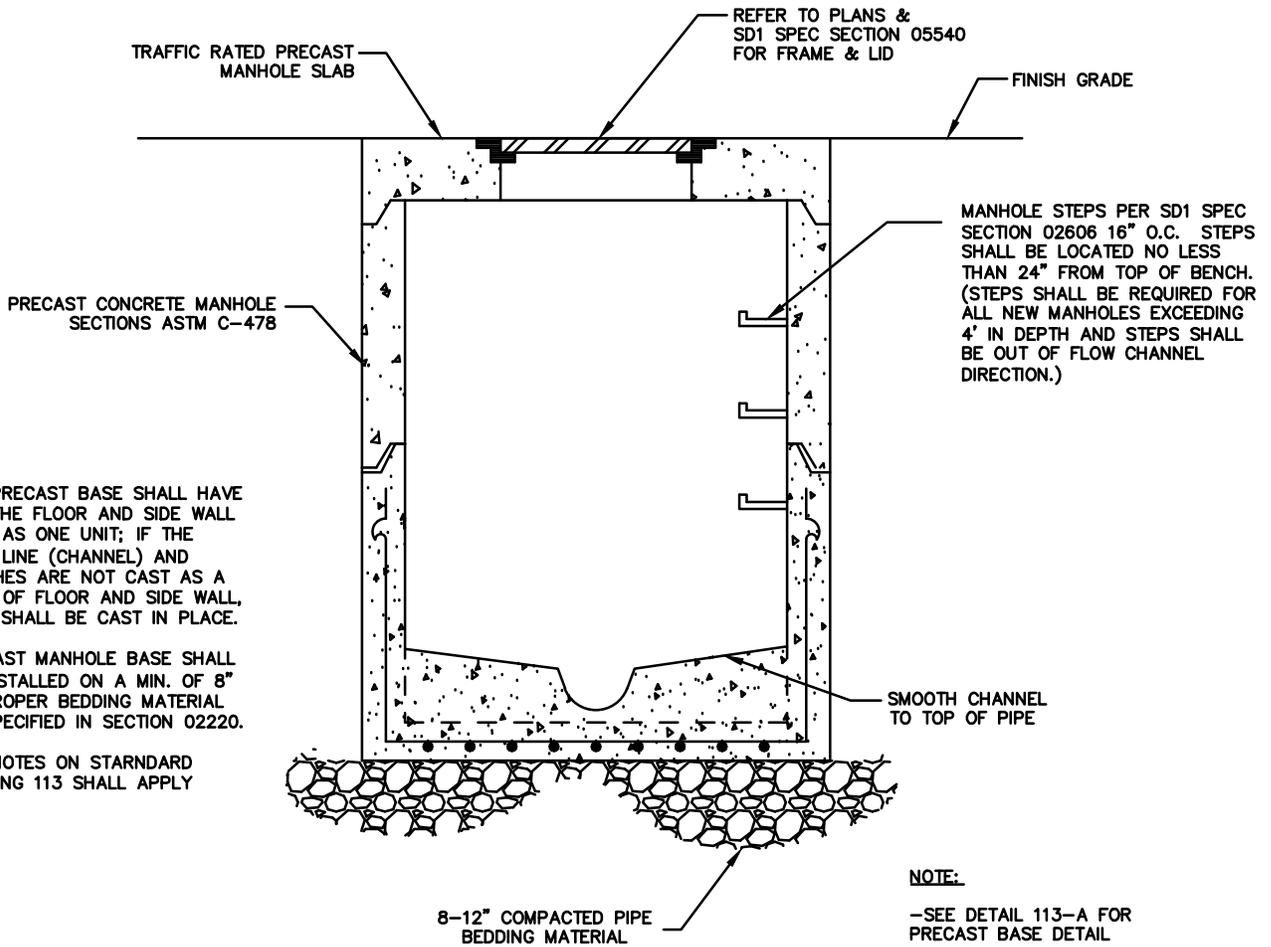

NOTES:

1. THE PRECAST BASE SHALL HAVE THE THE FLOOR AND SIDE WALL CAST AS ONE UNIT; IF THE FLOW LINE (CHANNEL) AND BENCHES ARE NOT CAST AS A PART OF FLOOR AND SIDE WALL, THEY SHALL BE CAST IN PLACE.
2. PRECAST MANHOLE BASE SHALL BE INSTALLED ON A MIN. OF 8" OF PROPER BEDDING MATERIAL AS SPECIFIED IN SECTION 02220.
3. ALL NOTES ON STARNDARD DRAWING 113 SHALL APPLY

SHALLOW MANHOLE

N.T.S.

REVISION	BY	DATE



SANITATION DISTRICT NO. 1
 1045 Eaton Drive
 FT. Wright, Kentucky 41017
 Ph: (859) 578-7460
 Fax: (859) 331-2436

DATE:
AUGUST 2018

STANDARD
DRAWING NO:

115