


PLAN

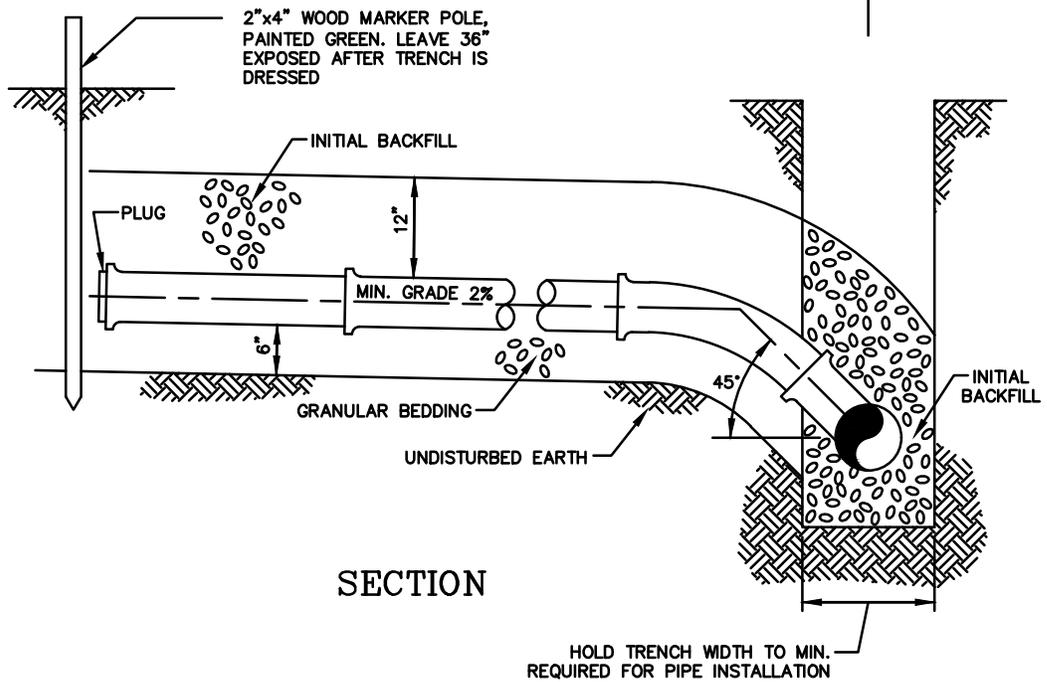

SECTION

**NOTE:**

1. SEWER SERVICE CONNECTION TO SEWER LATERAL SHALL BE BY MEANS OF FLEXIBLE PIPE CONNECTORS (COUPLING OR DONUT TYPE) WHEN JOINING PIPES OF DIFFERENT MATERIAL. DETAIL ALSO APPLIES FOR ALL 4" SEWER SERVICE LATERALS IF SHOWN ON DRAWINGS.
2. ALL LATERAL CONNECTIONS SHALL BE MADE BETWEEN THE 10 AND 11 O'CLOCK AND THE 1 AND 2 O'CLOCK POSITIONS TO THE SEWER MAIN.
3. LATERAL CONSTRUCTION SHALL FOLLOW LOCAL PLUMBING CODE REGULATIONS FOR CONSTRUCTION OUTSIDE THE PUBLIC R/W.
4. LATERAL INSTALLATIONS SHALL FOLLOW ALL BEDDING AND BACKFILL REQUIREMENTS IN SD1 STANDARD SPECIFICATIONS, SECTION 02220.

**SEWER LATERAL INSTALLATION**

N.T.S.

REVISION	BY	DATE



**SANITATION DISTRICT NO. 1**  
 1045 Eaton Drive  
 FT. Wright, Kentucky 41017  
 Ph: (859) 578-7460  
 Fax: (859) 331-2436

DATE:  
**SEPTEMBER 2018**

STANDARD  
 DRAWING NO:

**120**