


NOTES

PENETRATION TO PIPE SHALL BE CORE-DRILLED; HAMMER DRILL WILL NOT BE ACCEPTED. COUPONS SHALL BE SAVED.


GASKET TAPPING SADDLE TO HAVE A CONTINUOUS GASKET AROUND THE EDGE OR GASKET MATERIAL. MUST BE PLACED BETWEEN THE SADDLE AND THE EXISTING PIPE. NO PART OF THE SADDLE OR TAP SHALL PROTRUDE INTO THE PIPE.

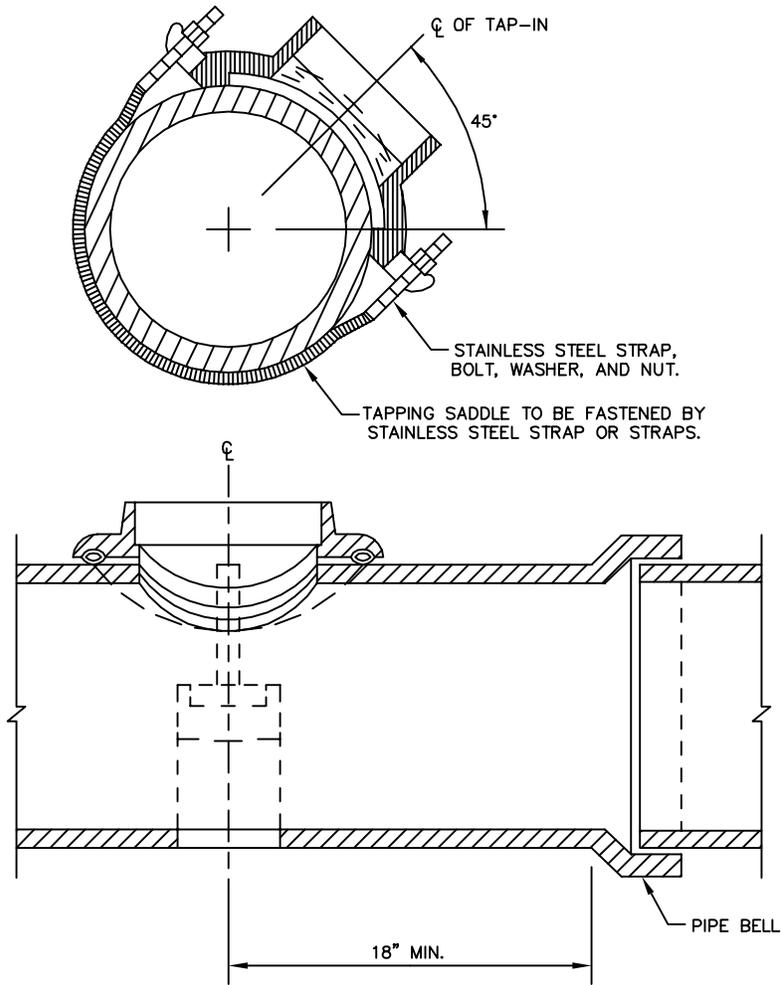

DUCTILE IRON TAPPING SADDLE

N.T.S.

REVISION	BY	DATE



SANITATION DISTRICT NO. 1

1045 Eaton Drive
 FT. Wright, Kentucky 41017
 Ph: (859) 578-7460
 Fax: (859) 331-2436

DATE:
 MARCH 2010

STANDARD
 DRAWING NO:

103